



Plastic blade instruction

Two blades


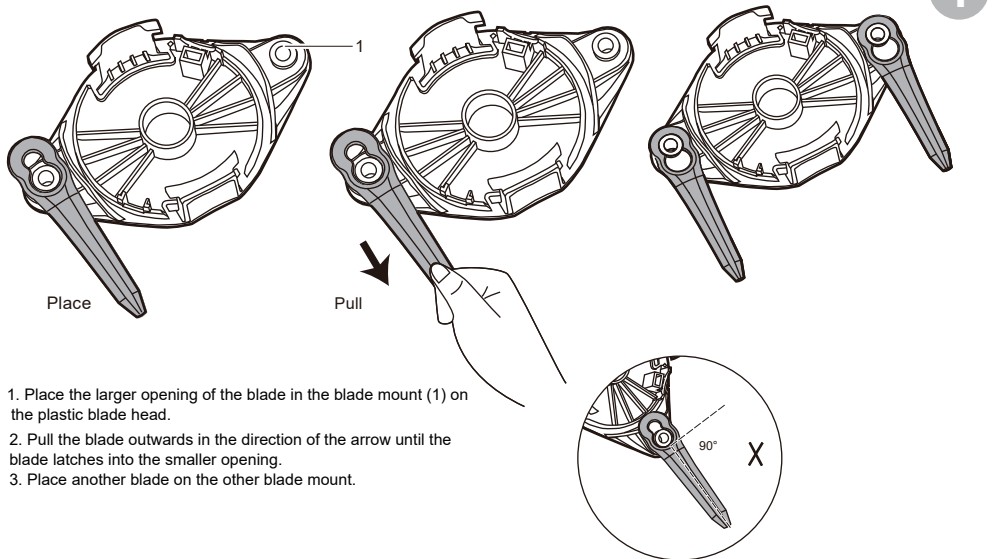


Note: Don't insert the plastic blade vertically. In order to prevent the product from vibrating, blades must be installed on both sides of the plastic blade head for normal use.

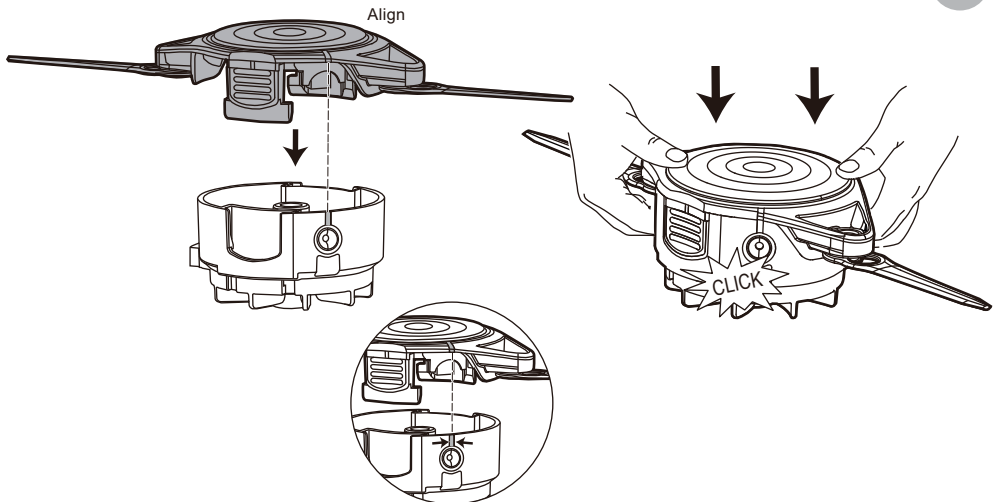



Note: Ensure that all the parts (including spool, lines and other debris) should be removed before replacing the plastic blade head, so that the plastic blades could be used successfully.

Push the tabs on the plastic blade head. Ensure that the slot on the plastic blade head aligns with the slot on the spool housing. Push the plastic blade head assembly until it clicks into position.

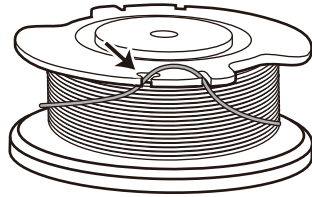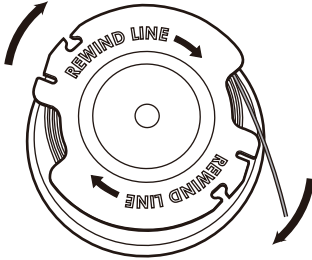

To prevent the cutting line from scattering, wind it around the spool tightly in the indicated direction and put the cutting line in the guide slot when removing the spool.

Single blade

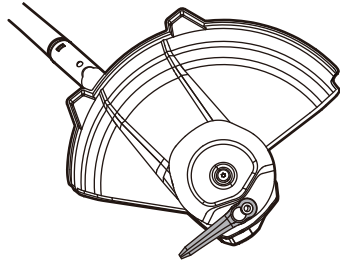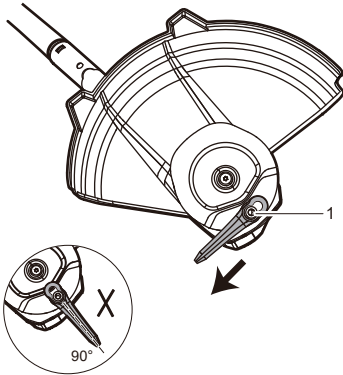

1. Place the larger opening of the blade in the blade mount(1) on the blade plate. Note: Don't insert the blade vertically.
2. Pull the blade outwards in the direction of the arrow until the blade latches into the smaller opening.